It's never easy for someone to talk about themselves, or for a Company to talk about its products, without falling into banality or exaggeration.
We can say, "We're the world leaders in the production of cooker hoods. Our level of quality is the highest you can find anywhere. We have exclusive awards and certifications. We have designs that are so new and various that we can satisfy every style and every degree of aesthetic sensibility."

But we want to do more: provide consumers with all the information necessary in order to make a considered choice from the products available on the market, through an analysis of their characteristics, so that it's possible to tell a good product from a mediocre one.

Looking through our catalogue, you'll form an opinion of Elica and its products, and at that point we're sure that you'll decide to make the same choice that over thirty eight years 53 million families all over the world have made: the choice to buy an Elica product – probably the best product available on the market today.

Elica _x_DR.indd 1 21/07/2009 11.36.47

Index

Wall Mounted

Aqua	30
Artica	19
Atlantis	22
Bogart	16
Candle	25
Circus	18
Cube	26
Focus	15
Futura	28
Glacier	14
Horizonte	10
Igloo	14
Key	31
Optica	20
Plaza	12
Rock	25
Samurai	15
Spot	27
Steel	9
Stenar	24
Stone	24
Stone Gallery	13
Tamaya	31
Tender	26
Tonda	29
Tuscan	30
Vision	6

Ceiling/Wall Mounted

Brigitte	37
Chrome	38
Jasmine	34
Juliette	36
Naked	40
Quad	41
Ring	41
Rose	35
Sophie	35

Ceiling Mounted

Antartica	45
Atlantica	49
Cubica	50
Free Spot	51
Glacier Island	48
Iceberg	47
Meridiana	44

Corner Mounted

Hydra	55
Personal	54

Built-in

Concorde	62
Elibloc HT	58
Elibloc 9	59
Eliper	58
Eliplane	59
Elislim	62
Glide	60
Integrata NG	63
Krea	63

Technologies 62

Elica _x_DR.indd 2-3 21/07/2009 11.37.05

Elica _x_DR.indd 4-5 21/07/2009 11.37.09

VISION

Elica Team design



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	2
IEC Airflow (m^3/h)	650
Max Airflow (m^3/h)	800
Pressure (Pa)	470
Max Noise Level dB(A)	61
Min Noise Level dB(A)	43
Absorption (W)	260
Size (mm)	810
Lighting	Halo 2x20 W
Version	Recycling
Duct Size (mm)	150

SYSTEMS
Secret Screen
Perimeter aspiration

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Included	**F00171/1S**
Long Life Charcoal Filter	Not available	
Chimney Kit	Optional	**KIT02323**

DESCRIPTION	
VISION PL3V VT-IX/F/80	**71816370**

Elica _x_DR.indd 6-7 21/07/2009 11.37.24

STEEL

Elica Team design



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	2
IEC Airflow (m^3/h)	650
Max Airflow (m^3/h)	800
Pressure (Pa)	470
Max Noise Level dB(A)	61
Min Noise Level dB(A)	43
Absorption (W)	260
Size (mm)	810
Lighting	Halo 2x20 W
Version	Recycling
Duct Size (mm)	150

SYSTEMS	
Secret Screen	
Perimeter aspiration	

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Included	**F00171/1S**
Long Life Charcoal Filter	Not available	
Chimney Kit	Optional	**KIT02324**

DESCRIPTION	
STEEL PL3V IX/F/80	**71816372**

Elica _x_DR.indd 8-9 21/07/2009 11.37.34

HORIZONTE

Elica Team design



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S+B Touch Screen
N. Motors	1
IEC Airflow (m^3/h)	820
Max Airflow (m^3/h)	900
Pressure (Pa)	550
Max Noise Level dB(A)	50
Min Noise Level dB(A)	35
Absorption (W)	290
Size (mm)	900 - 1200
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Elica Deep Silence (EDS3)
Perimeter aspiration

ACCESSORIES		CODE
Grease Filter	GFA EDS3 Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Optional	**KIT01916**

DESCRIPTION	
HORIZONTE EDS IX VT/A/90	**69915933**
HORIZONTE EDS IX VT/A/120	**69915934**

PLAZA



FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel + Glass	
TECHNICAL DATA		
Controls	3S Soft Touch Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	680	
Max Airflow (m^3/h)	850	
Pressure (Pa)	470	
Max Noise Level dB(A)	61	
Min Noise Level dB(A)	43	
Absorption (W)	290	
Size (mm)	800	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Perimeter aspiration		
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Optional	**F00264/1S**
Chimney extension kit (230 mm IX)	Optional	**KIT00780**
DESCRIPTION		
PLAZA IX/A/80		**64914572**

STONE GALLERY

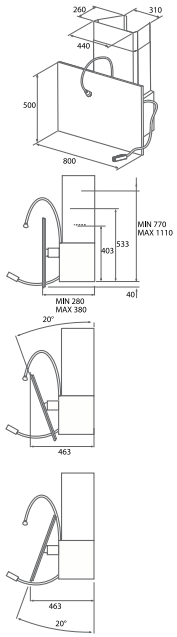

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Lavagna Black Stone Lavagna White Stone No Stone	
TECHNICAL DATA		
Controls	3S Soft Light Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	220	
Size (mm)	800	
Lighting	Halo 2x20 W + Led 1x2 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Smart		
Optimized aspiration system		
3D Adjustment		
ACCESSORIES		**CODE**
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**
DESCRIPTION		
STONE GALLERY AN/A/80 (NO STONE)		**61414562**
STONE GALLERY AN/A/80 (BLACK)		**61414563**
STONE GALLERY AN/A/80 (WHITE)		**61414593**





IGLOO

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel + Glass	
TECHNICAL DATA		
Controls	3S Mechanical Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	240	
Size (mm)	900	
Lighting	Halo 2 x 20 W	
Version	Duct Out	
Duct Size (mm)	150	
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00187/1S**
Long Life Charcoal Filter	Not available	
Chimney Extension Kit (+400mm IX)	Optional	**KIT00775**
Backplate	Optional	**KIT01007**
DESCRIPTION		
IGLOO IX F/90		**3725758/1**

GLACIER

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel + Glass	
TECHNICAL DATA		
Controls	3S Soft Touch Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	210	
Size (mm)	600 - 700 - 800 - 900 - 1000 - 1100 - 1200	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
ACCESSORIES		**CODE**
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**
DESCRIPTION		
GLACIER IX/VETRO A/60		**4849366/2 ***
GLACIER IX/VETRO A/70		**48411757/2 ***
GLACIER IX/VETRO A/80		**48411756/2 ***
GLACIER IX/VETRO A/90		**4849367/2 ***
GLACIER IX/VETRO A/100		**48412575/2 ***
GLACIER IX/VETRO A/110		**48412982/2 ***
GLACIER IX/VETRO A/120		**4849368/2 ***

*** External motor versions available**





SAMURAI

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	3S Soft Light Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	220	
Size (mm)	900	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Smart		
Optimized aspiration system		
3D Adjustment		
ACCESSORIES		**CODE**
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**
DESCRIPTION		
SAMURAI Soft IX/A/90		**53414556**

FOCUS

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	3S+B Touch Control	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	250	
Size (mm)	900	
Lighting	Halo 4x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Smart		
Optimized aspiration system		
3D Adjustment		
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**
DESCRIPTION		
FOCUS TC IX/A/90		**47514619**

BOGART

design by David Lewis



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	220
Size (mm)	900

Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system
3D Adjustment

ACCESSORIES		CODICE CODE
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
BOGART SOFT IX/A/90	**53016347**

CIRCUS HP



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Touch Control + display + booster
N. Motors	1
IEC Airflow (m^3/h)	680
Max Airflow (m^3/h)	850
Pressure (Pa)	470
Max Noise Level dB(A)	61
Min Noise Level dB(A)	43
Absorption (W)	290
Size (mm)	600 - 900
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Not available	

DESCRIPTION	
CIRCUS HP IX/A/60	**68117541**
CIRCUS HP IX/A/90	**68117542**

ARTICA



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
PMax Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	220
Size (mm)	900
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system
3D Adjustment

ACCESSORIES		CODE
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
ARTICA Soft Light IX/A/90	**50816337**
ARTICA GME TC IX/A/90	**50816338***
ARTICA AST IX/A/90	**50816339**

*** Available with 1200m^3/h external motor (3S touch controls + boost)**

OPTICA

Elica Team design



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	220
Size (mm)	900
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system
3D Adjustment

ACCESSORIES		CODE
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
OPTICA SOFT HALO IX/A/90	**53316348**

ATLANTIS

Elica Team design



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	220
Size (mm)	900
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system
3D Adjustment

ACCESSORIES		CODE
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
ATLANTIS Soft IX/A/90	**51216345**



STONE

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	3S Soft Light Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	220	
Size (mm)	332	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Smart		
Optimized aspiration system		
3D Adjustment		
ACCESSORIES		**CODE**
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**
DESCRIPTION		
STONE IX/A/33		**61412862**



STENAR

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	3S Mechanical Push Botton	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	210	
Size (mm)	360	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Smart		
Optimized aspiration system		
3D Adjustment		
ACCESSORIES		**CODE**
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**
DESCRIPTION		
STENAR IX/A/36		**61212733**



ROCK

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	6S Touch Control	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	520	
Max Noise Level dB(A)	67	
Min Noise Level dB(A)	47	
Absorption (W)	270	
Size (mm)	430 - 600	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Perimeter aspiration system		
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
Charcoal Filter (430 mm)	Optional	**F00482/1S**
Charcoal Filter (600 mm)	Optional	**F00333/1S**
Long Life Charcoal Filter	Not available	
DESCRIPTION		
ROCK TC IX/A/43		**40115238**
ROCK TC IX/A/60		**40116376**



CANDLE

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	6S Touch Control	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	520	
Max Noise Level dB(A)	67	
Min Noise Level dB(A)	47	
Absorption (W)	270	
Size (mm)	400	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Perimeter aspiration system		
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00482/1S**
Long Life Charcoal Filter	Not available	
DESCRIPTION		
CANDLE TC IX/A/40		**40115240**





TENDER

EDS3 DeepSilence

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	3S+B LCD	
N. Motors	1	
IEC Airflow (m^3/h)	820	
Max Airflow (m^3/h)	900	
Pressure (Pa)	550	
Max Noise Level dB(A)	50	
Min Noise Level dB(A)	35	
Absorption (W)	290	
Size (mm)	700 - 900	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Elica Deep Silence (EDS3)		
ACCESSORIES		**CODE**
Grease Filter	GFA EDS3 Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Optional	**KIT01916**
DESCRIPTION		
TENDER EDS IX/A/70		**55916238**
TENDER EDS IX/A/90		**55916232**

CUBE

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel + Glass	
TECHNICAL DATA		
Controls	3S Soft Touch Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	210	
Size (mm)	600 - 900	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Smart		
Optimized aspiration system		
3D Adjustment		
ACCESSORIES		**CODE**
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**
Chimney Extension Kit (+ 230 mm IX)	Optional	**KIT00780**
DESCRIPTION		
CUBE IX/A/60		**51713693***
CUBE IX/A/90		**51713694***

*** Available with 1200m^3/h external motor**

SPOT



FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	3S Mechanical Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	630	
PMax Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	210 (230 1200 mm)	
Size (mm)	600 - 1200	
Lighting	Halo 2x20 W (3x20 W 1200 mm)	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Smart		
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**
Chimney Extension Kit (+230 mm IX)	Optional	**KIT00780**
Shelf and plate rack Kit INOX H6 600-900 mm	Optional	**KIT00792**
DESCRIPTION		
SPOT H6 LX IX/A/60		**55911352**
SPOT H6 LX IX/A/90		**55911346**

check codes and descriptions
we have codes for H6 and 60 and 90cm!!

FUTURA



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	250
Size (mm)	1200
Lighting	Halo 4x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system
3D Adjustment

ACCESSORIES		CODE
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
FUTURA SOFT IX/A/120	**53616349**

TONDA



FEATURES	
Model	
Installation	Wall Mounted
Finish	Stainless Steel

TECHNICAL DATA	
Controls	3S Slider
N. Motors	1
IEC Airflow (m^3/h)	430
Max Airflow (m^3/h)	480
Pressure (Pa)	290
Max Noise Level dB(A)	65
Min Noise Level dB(A)	51
Absorption (W)	230
Size (mm)	600 - 900
Lighting	2x40 W
Version	Duct Out
Duct Size (mm)	125

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00169/2S**
Long Life Charcoal Filter	Not available	

DESCRIPTION	
TONDA IX F/60	**2938000**
TONDA IX F/90	**2937999**





AQUA

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	3S Slider	
N. Motors	1	
IEC Airflow (m^3/h)	430	
Max Airflow (m^3/h)	480	
Pressure (Pa)	290	
Max Noise Level dB(A)	65	
Min Noise Level dB(A)	51	
Absorption (W)	230	
Size (mm)	600 - 900	
Lighting	2x40 W	
Version	Duct Out	
Duct Size (mm)	125	
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
	GFI Optional	**KIT01036**
Charcoal Filter	Optional	**F00169/2S**
Long Life Charcoal Filter	Not available	
Chimney Extens.Kit(+390mm IX)	Optional	**KIT00778**
Chimney Extens.Kit(+610mm IX)	Optional	**KIT00779**
Chimney Extens.Kit(-130mm IX)	Optional	**KIT0075F**
DESCRIPTION		
AQUA IX F/60		**4249920**
AQUA IX F/90		**4249921**

TUSCAN

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	3S Soft Touch Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	210	
Size (mm)	600 - 900	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
SYSTEMS		
Smart		
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
	GFI Optional	**KIT01036**
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**
Chimney extension Kit (+ 230 mm IX)	Optional	**KIT00780**
DESCRIPTION		
TUSCAN IX A/60		**4769809/1**
TUSCAN IX A/90		**4769810/1**





TAMAYA

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel Black, White	
TECHNICAL DATA		
Controls	3S Slider	
N. Motors	1	
IEC Airflow (m^3/h)	430	
Max Airflow (m^3/h)	480	
Pressure (Pa)	290	
Max Noise Level dB(A)	65	
Min Noise Level dB(A)	51	
Absorption (W)	230	
Size (mm)	600 - 700 - 900 - 1000	
Lighting	2x40 W	
Version	Duct Out	
Duct Size (mm)	125	
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
	GFI Optional	**KIT01036**
Charcoal Filter	Optional	**F00169/2S**
Long Life Charcoal Filter	Not available	
Chimney Extens.Kit(+390mm S/S only)	Optional	**KIT00778**
Chimney Extens.Kit(+610mm S/S only)	Optional	**KIT00779**
Chimney Extens.Kit(-130mm S/S only)	Optional	**KIT007SF**
DESCRIPTION		
TAMAYA IX A/60		**3876567/2**
TAMAYA IX A/70		**3878896/1**
TAMAYA IX A/90		**3876570/2**
TAMAYA IX A/100		**3879467/1**
TAMAYA BL A/60		**3876565/1**
TAMAYA BL A/90		**3876568/1**
TAMAYA WH F/60		**3876566/1**

KEY

FEATURES		
Model		
Installation	Wall Mounted	
Finish	Stainless Steel	
TECHNICAL DATA		
Controls	3S Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	630	
Max Airflow (m^3/h)	750	
Pressure (Pa)	370	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	46	
Absorption (W)	210	
Size (mm)	600 - 900	
Lighting	Halo 2x20 W	
Version	Duct Out	
Duct Size (mm)	150	
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
	GFI Optional	**KIT01036**
Charcoal Filter	Optional	**F00169/1**
Long Life Charcoal Filter	Not available	
Chimney Extens.Kit(+390mm IX)	Optional	**KIT00778**
Chimney Extens.Kit(+610mm IX)	Optional	**KIT00779**
Chimney Extens.Kit(-130mm IX)	Optional	**KIT0075F**
DESCRIPTION		
KEY IX A/60		**40812983**
KEY IX A/90		**40812984**

Elica _x_DR.indd 32-33 21/07/2009 11.39.02

JASMINE

Elica Team design

FEATURES		
Model		
Installation	Ceiling	
Finish	Stainless Steel + Ivory Stainless Steel + Violet	

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	460
Max Airflow (m^3/h)	500
Pressure (Pa)	340
Max Noise Level dB(A)	64
Min Noise Level dB(A)	44
Absorption (W)	370
Size (mm)	500
Lighting	Halo 2x20 W + 4x40 W
Version	Recycling
Duct Size (mm)	125

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Included	**F00264/1S**
Ducting Kit	Optional	**KIT02262**
Wall Mounted Installation Kit	Optional	**KIT02263**
Extension Cable Kit (2,5m)	Optional	**KIT01889**
Extension Cable Kit (5m)	Optional	**KIT01921**

DESCRIPTION	
JASMINE PEARL F/50	**71716351**
JASMINE VIOLET F/50	**71716350**



SOPHIE

Elica Team design

FEATURES		
Model		
Installation	Ceiling	
Finish	Stainless Steel + Ivory Stainless Steel + Green	

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	460
Max Airflow (m^3/h)	500
Pressure (Pa)	340
Max Noise Level dB(A)	64
Min Noise Level dB(A)	44
Absorption (W)	210
Size (mm)	500
Lighting	Halo 2x20 W
Version	Recycling
Duct Size (mm)	125

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Included	**F00264/1S**
Ducting Kit	Optional	**KIT02262**
Wall Mounted Install. Kit	Optional	**KIT02263**
Extension Cable Kit (2,5m)	Optional	**KIT01889**
Extension Cable Kit (5m)	Optional	**KIT01921**

DESCRIPTION	
SOPHIE PEARL F/50	**71716354**
SOPHIE GREEN F/50	**71716355**

ROSE

Elica Team design

FEATURES		
Model		
Installation	Ceiling	
Finish	Stainless Steel + Ivory Stainless Steel + Orange	

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	460
Max Airflow (m^3/h)	500
Pressure (Pa)	340
Max Noise Level dB(A)	64
Min Noise Level dB(A)	44
Absorption (W)	370
Size (mm)	500
Lighting	Halo 2x20 W + 4x40 W
Version	Recycling
Duct Size (mm)	125

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Included	**F00264/1S**
Ducting Kit	Optional	**KIT02262**
Wall Mounted Install. Kit	Optional	**KIT02263**
Extension Cable Kit (2,5m)	Optional	**KIT01889**
Extension Cable Kit (5m)	Optional	**KIT01921**

DESCRIPTION	
ROSE PEARL F/50	**71716353**
ROSE SUNSET F/50	**71716352**

Elica _x_DR.indd 34-35 21/07/2009 11.39.16

JULIETTE

Elica Team design



FEATURES		
Model		
Installation	Ceiling	
Finish	Stainless Steel + Ivory Stainless Steel + Green	
TECHNICAL DATA		
Controls	3S Soft Light Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	460	
Max Airflow (m^3/h)	500	
Pressure (Pa)	340	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	44	
Absorption (W)	450	
Size (mm)	900	
Lighting	Halo 2x20 W + 6x40 W	
Version	Recycling	
Duct Size (mm)	125	
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Included	**F00264/1S**
Ducting Kit	Optional	**KIT02262**
Extension Cable Kit (2,5m)	Optional	**KIT01889**
Extension Cable Kit (5m)	Optional	**KIT01921**
DESCRIPTION		
JULIETTE GREEN F/90		**71716356**
JULIETTE PEARL F/90		**71716357**

BRIGITTE

Elica Team design



FEATURES		
Model		
Installation	Ceiling	
Finish	Stainless Steel + Ivory Stainless Steel + Violet	
TECHNICAL DATA		
Controls	3S Soft Light Push Button	
N. Motors	1	
IEC Airflow (m^3/h)	460	
Max Airflow (m^3/h)	500	
Pressure (Pa)	340	
Max Noise Level dB(A)	64	
Min Noise Level dB(A)	44	
Absorption (W)	450	
Size (mm)	900	
Lighting	Halo 2x20 W + 6x40 W	
Version	Recycling	
Duct Size (mm)	125	
ACCESSORIES		**CODE**
Grease Filter	GFA Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Included	**F00264/1S**
Ducting Kit	Optional	**KIT02262**
Extension Cable Kit (2,5m)	Optional	**KIT01889**
Extension Cable Kit (5m)	Optional	**KIT01921**
DESCRIPTION		
BRIGITTE PEARL F/90		**71716359**
BRIGITTE VIOLET F/90		**71716358**

Elica _x_DR.indd 36-37 21/07/2009 11.39.25

CHROME

Elica Team design







FEATURES	
Model	
Installation	Ceiling
Finish	Shiny Stainless Steel

TECHNICAL DATA	
Controls	3S + B Magic Wand
N. Motors	1
IEC Airflow (m^3/h)	820
Max Airflow (m^3/h)	900
Pressure (Pa)	550
Max Noise Level dB(A)	50
Min Noise Level dB(A)	35
Absorption (W)	290 - 330
Size (mm)	850x430 - 580x430 - 460x460
Lighting	Halo 2x20 W - 4x20 W (850mm)
Version	Duct Out
Duct Size (mm)	150

SYSTEMS	
Elica Deep Silence (EDS3)	

ACCESSORIES		CODE
Grease Filter	GFA EDS3 Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Optional	**KIT01916**
Remote Control Kit	Optional	**KIT02183**

DESCRIPTION	
CHROME EDS IX/A/46	**69315812**
CHROME EDS IX/A/58	**69315976**
CHROME EDS IX/A/85	**69315977**

NAKED



FEATURES	
Model	
Installation	Ceiling
Finish	Stainless Steel

TECHNICAL DATA	
Controls	3S + B Magic Wand
N. Motors	1
IEC Airflow (m^3/h)	360
Max Airflow (m^3/h)	400
Max Noise Level dB(A)	62
Min Noise Level dB(A)	42
Absorption (W)	150
Size (mm)	248
Lighting	Halo 1x40 W
Version	Recycling

SYSTEMS
Evolution

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Included	**F00433/1**
Remote Control Kit	Optional	**KIT02183**
Extension Cable Kit (2,5 m)	Optional	**KIT01889**
Extension Cable Kit (5,0 m)	Optional	**KIT01921**

DESCRIPTION	
NAKED IX/F/25	**64714985**



QUAD

FEATURES	
Model	
Installation	Ceiling
Finish	Stainless Steel

TECHNICAL DATA	
Controls	6S Touch Control
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	520
Max Noise Level dB(A)	67
Min Noise Level dB(A)	47
Absorption (W)	270
Size (mm)	430x430
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Perimeter aspiration system

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00482/1S**
Long Life Charcoal Filter	Not available	

DESCRIPTION	
QUAD TC IX/A/43x43	**40115237**

RING



FEATURES	
Model	
Installation	Ceiling
Finish	Stainless Steel

TECHNICAL DATA	
Controls	6S Touch Control
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	520
Max Noise Level dB(A)	67
Min Noise Level dB(A)	47
Absorption (W)	270
Size (mm)	400x400
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Perimeter aspiration system

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00482/1S**
Long Life Charcoal Filter	Not available	

DESCRIPTION	
RING TC IX/A/40x40	**40115239**

Elica _x_DR.indd 42-43 21/07/2009 11.40.26

MERIDIANA

Elica Team design



FEATURES	
Modello Model	
Installazione Installation	Ceiling
Finitura Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S+B Touch Screen
N. Motors	1
IEC Airflow (m^3/h)	820
Max Airflow (m^3/h)	900
Pressure (Pa)	550
Max Noise Level dB(A)	50
Min Noise Level dB(A)	35
Absorption (W)	330
Size (mm)	1200x700
Lighting	Halo 4x20 W
Version	Duct Out
Duct Size (mm)	150

SISTEMI SYSTEMS
Elica Deep Silence (EDS3)
Perimeter aspiration

ACCESSORIES		CODE
Grease Filter	GFA EDS3 Included	
Charcoal Filter	Not available	
Long Life Charcoal Filter	Optional	**KIT01916**

DESCRIPTION	
MERIDIANA EDS IX VT/A/120X70	**69916134**

ANTARTICA



FEATURES	
Model	
Installation	Ceiling
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	260
Size (mm)	1000x700
Lighting	Halo 4x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system

ACCESSORIES		CODE
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
ANTARTICA Soft IX/A/100X70	**50916340**
ANTARTICA H Soft IX/A/100X70	**50916341**
ANTARTICA RM TC IX/A/100X70	**50916342***
ANTARTICA AST IX/A/100X70	**50916343**

*** Available with 1200m3/h external motor**

ICEBERG



FEATURES	
Model	
Installation	Ceiling
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Mechanical Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	280
Size (mm)	1000x700
Lighting	Halo 4x20 W
Version	Duct Out
Duct Size (mm)	150

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00187/1S**
Long Life Charcoal Filter	Not available	
Chimney Kit (makes hood 1600mm high)	Optional	**KIT00424**

DESCRIPTION	
ICEBERG IX VETRO A/100	**3816536/1**
ICEBERG SF IX VETRO A/100	**38111800/1**

GLACIER ISLAND



FEATURES	
Model	
Installation	Ceiling
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Touch Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	250
Size (mm)	1000x700
Lighting	Halo 4x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system

ACCESSORIES		CODE
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
GLACIER ISL IX/A/100X70	**5211011/1**
GLACIER ISL RM IX/A/100X70	**52111210/1***

*** Available with 1200m3/h external motor**

ATLANTICA



FEATURES	
Model	
Installation	Ceiling
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	260
Size (mm)	1000x700
Lighting	Halo 4x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system

ACCESSORIES		CODE
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
ATLANTICA SOFT IX/A/100X70	**57516346**

CUBICA



FEATURES	
Model	
Installation	Ceiling
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Touch Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	250
Size (mm)	900x600
Lighting	Halo 4x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system

ACCESSORIES		CODE
Grease Filter	Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
CUBICA IX/A/90x60	**51613707**

FREE SPOT



FEATURES	
Model	
installation	Ceiling
Finish	Stainless Steel

TECHNICAL DATA	
Controls	3S Mechanical Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	250
Size (mm)	1000x600 - 1200x600
Lighting	Halo 4x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart

ACCESSORIES		CODE
Grease Filter	GFA Included	
	GFI Optional	**KIT01036**
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
FREE SPOT H10 LX IX A/100	**57312966**
FREE SPOT H10 LX IX A/120	**57312967**

Elica _x_DR.indd 52-53 21/07/2009 11.41.05

PERSONAL



FEATURES	
Model	
Installation	Corner
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	220
Size (mm)	1000x1000
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS
Smart
Optimized aspiration system

ACCESSORIES		CODE
Grease Filter	GFI Professional Included	
Charcoal Filter	Optional	**F00333/1S**
Long Life Charcoal Filter	Optional	**F00262/2S**

DESCRIPTION	
PERSONAL VT+IX/A/100	**66414789**

HYDRA



FEATURES	
Model	
Installation	Corner
Finish	Stainless Steel

TECHNICAL DATA	
Controls	3S Mechanical Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	390
Max Noise Level dB(A)	65
Min Noise Level dB(A)	46
Absorption (W)	240
Size (mm)	1000x1000
Lighting	Halo 4x20 W
Version	Duct out
Duct Size (mm)	150

ACCESSORIES		CODE
Grease Filter	GFA Included	
	GFI Optional	**KIT01036**
Charcoal Filter	Optional	**F00169/2S**
Long Life Charcoal Filter	Not available	

DESCRIPTION	
HYDRA ANG IX F/100	**1608046/1**

Elica _x_DR.indd 56-57 21/07/2009 11.41.17



ELIPER

FEATURES

Model	
Installation	Built-in
Finish	Stainless Steel

TECHNICAL DATA

Controls	3S Soft Light Push Button
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	43
Absorption (W)	210
Size (mm)	600 - 800
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

SYSTEMS

Perimeter aspiration	

ACCESSORIES		CODE
Grease Filter	GFI Included	
Charcoal Filter	Optional (2 x required)	**F00366**
Long Life Charcoal Filter	Not available	

DESCRIPTION	
ELIPER IX/A/60	**17616385**
ELIPER IX/A/80	**17616384**



ELIBLOC HT

FEATURES

Model	
Installation	Built-in
Finish	Silver

TECHNICAL DATA

Controls	3S + B Slider
N. Motors	1
IEC Airflow (m^3/h)	630
Max Airflow (m^3/h)	750
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	255
Size (mm)	800
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Optional	**F00169/2S**
Long Life Charcoal Filter	Not available	

DESCRIPTION	
ELIBLOC HT GR/A/80	**17614580**



ELIPLANE

FEATURES

Model	
Installation	Built-in
Finish	Stainless steel

TECHNICAL DATA

Controls	Electronic Slider
N. Motors	2
IEC Airflow (m^3/h)	440
Max Airflow (m^3/h)	480
Pressure (Pa)	370
Max Noise Level dB(A)	69
Min Noise Level dB(A)	54
Absorption (W)	295
Size (mm)	600 - 800
Lighting	PL 1x11 W
Version	Duct Out
Duct Size (mm)	125

ACCESSORIES		CODE
Grease Filter	Aluminium inc.	
Charcoal Filter	Optional	**F00171/1**
Long Life Charcoal Filter	Not available	

DESCRIPTION	
ELIPLANE LX IX F/60	**1013388/3**
ELIPLANE LX IX F/80	**1013389/3**



ELIBLOC 9

FEATURES

Model	Std	Lux
Installation	Built-in	Built-in
Finish	Silver	Silver

TECHNICAL DATA

Controls	3S Slider	3S Slider
N. Motors	1	2
IEC Airflow (m^3/h)	250	440
Max Airflow (m^3/h)	280	480
Pressure (Pa)	260	370
Max Noise Level dB(A)	65	67
Min Noise Level dB(A)	53	54
Absorption (W)	200	320
Size (mm)	600	600 - 800
Lighting	2x40 W	2x40 W
Version	Duct Out	Duct Out
Duct Size (mm)	100	125

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Optional (2 x required for Lux)	**F00189/1S**
Long Life Charcoal Filter	Not available	

DESCRIPTION	
ELIBLOC 9 ST SILVER F/60	**1755555/2**
ELIBLOC 9 LX SILVER F/60	**1745563/2**
ELIBLOC 9 LX SILVER F/80	**1745564/2**
ELIBLOC 9 RM SILVER F/60	**27512771***
ELIBLOC 9 RM SILVER F/80	**27512772***

*** Available with 1200m^3/h external motor - 150mm ducting required**

Elica _x_DR.indd 58-59 21/07/2009 11.41.29

GLIDE



FEATURES	
Model	
Installation	Built-in
Finish	Stainless Steel + Glass

TECHNICAL DATA	
Controls	3S Soft Light Push Button
N. Motors	2
IEC Airflow (m^3/h)	650
Max Airflow (m^3/h)	800
Pressure (Pa)	470
Max Noise Level dB(A)	61
Min Noise Level dB(A)	43
Absorption (W)	260
Size (mm)	600 - 900
Lighting	Halo 2x20 W
Version	Duct Out
Duct Size (mm)	150

ACCESSORIES		CODE
Grease Filter	GFI Included	
Charcoal Filter	Optional	**F00171/1S**
Long Life Charcoal Filter	Not availbale	

DESCRIPTION	
GLIDE SOFT IX/A/60	**52614597**
GLIDE SOFT IX/A/90	**52614598**





ELISLIM

FEATURES

Model	
Installation	Built-in
Finish	White with stainless steel front panel

TECHNICAL DATA

Controls	3S Slider
N. Motors	2
IEC Airflow (m^3/h)	440
Max Airflow (m^3/h)	480
Pressure (Pa)	370
Max Noise Level dB(A)	64
Min Noise Level dB(A)	46
Absorption (W)	320
Size (mm)	600 - 900
Lighting	2x40 W
Version	Duct Out
Duct Size (mm)	125

ACCESSORIES		CODE
Grease Filter	Aluminium	
Charcoal Filter	Optional (2 x required)	**F00189**
Long Life Charcoal Filter	Not available	

DESCRIPTION

ELISLIM LX WH F/60	**24013711**
ELISLIM LX WH F/90	**24013712**

CONCORDE

FEATURES

Model	Std	Lux
Installation	Undercabinet	Undercabinet
Finish	Stainless Steel	Stainless Steel
	White	White
	Black	Black

TECHNICAL DATA

Controls	3S Slider	3S Slider
N. Motors	1	2
IEC Airflow (m^3/h)	220	360
Max Airflow (m^3/h)	250	400
Pressure (Pa)	190	360
Max Noise Level dB(A)	67	69
Min Noise Level dB(A)	52	55
Absorption (W)	160	320
Size (mm)	600	600 - 900
Lighting	1x40 W	2x40 W
Version	Recycling	Recycling
Duct Size (mm)	125	125

ACCESSORIES		CODE
Grease Filter	Synthetic Inc./Aluminium Inc.	
Charcoal Filter	Included	**F00159/1S**
Long Life Charcoal Filter	Not available	

DESCRIPTION

CONCORDE ST BL F/60	**1254917/2**
CONCORDE ST WH F/60	**1254913/2**
CONCORDE ST IX F/60	**1255039/2**
CONCORDE LX BL F/60	**1275534/3**
CONCORDE LX WH F/60	**1275533/3**
CONCORDE LX IX F/60	**1275532/3**
CONCORDE LX BL F/90	**12710809/1**
CONCORDE LX WH F/90	**12710808/1**
CONCORDE LX IX F/90	**1277303/2**





INTEGRATA NG

FEATURES

Model	Std	Lux
Installation	Built-in	Built-in
Finish	Silver	Silver

TECHNICAL DATA

Controls	3S Slider	3S Slider
N. Motors	1	2
IEC Airflow (m^3/h)	250	520
Max Airflow (m^3/h)	280	570
Pressure (Pa)	190	320
Max Noise Level dB(A)	57	66
Min Noise Level dB(A)	50	52
Absorption (W)	140	310
Size (mm)	600	600
Lighting	2x40 W	2x40 W
Version	Duct Out	Duct Out
Duct Size (mm)	125	125

ACCESSORIES		CODE
Grease Filter	Aluminium Included	
Charcoal Filter	Optional (Std)	**F00366**
	Optional (Lux 2 x required)	**F00366**
Long Life Charcoal Filter	Not available	

DESCRIPTION

INTEGRATA NG ST GR F/60	**5414464**
INTEGRATA NG LUX GR F/60	**5414465**

KREA

FEATURES

Model	Std	Lux
Installation	Undercabinet	Undercabinet
Finish	Stainless Steel	Stainless Steel
	White	
	Black	

TECHNICAL DATA

Controls	3S Slider	3S Slider
N. Motors	1	1
IEC Airflow (m^3/h)	240	400
Max Airflow (m^3/h)	270	440
Pressure (Pa)	200	450
Max Noise Level dB(A)	59	69
Min Noise Level dB(A)	48	50
Absorption (W)	140	240
Size (mm)	600	600 - 900
Lighting	2x40 W	2x40 W
Version	Recycling	Recycling
Uscita (mm) Duct Size (mm)	125	125

ACCESSORIES		CODE
Grease Filter	GFA Included	
Charcoal Filter	Included	**F00572**
Long Life Charcoal Filter	Not available	

DESCRIPTION

KREA GFA IX F/60	**5311274/2**
KREA GFA WH F/60	**55310774/2**
KREA GFA BL F/60	**55310776/2**
KREA LX IX F/60	**55311112/1**
KREA LX IX F/90	**55311129/1**

Elica _x_DR.indd 62-63 21/07/2009 11.41.46

Technologies



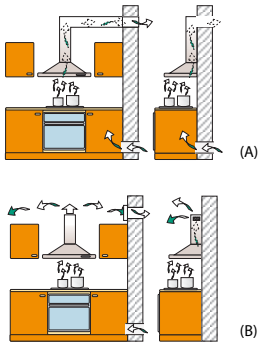

What determines the quality of a hood?

Besides its physical appearance, which is essential to its integration into a particular environment, the efficiency of its suction, the level of silence offered and the mechanical and electrical safety of the product are all fundamental aspects which should be taken into consideration when choosing a quality product.

How to select the correct capacity

The necessary suction capacity usually depends on the size of the kitchen and on the cooking method used. A single calculation can be used to identify the correct product capacity. Simply multiply the volume of the room by 10 and this will give you the ideal capacity for that area.
For example, when fitting a hood in a kitchen measuring 3 x 4 m with a height of 2.7 m: (3 x 4 x 2,7) x 10 = 324
Therefore, any product with a maximum capacity of over 324 m3/h will be able to guarantee full and efficient ventilation in the room.
Do not forget, however, to take your cooking habits into account:
For anyone who regularly prepares food quickly and has a small kitchen, the model should have a capacity of up to 300/400 m3/h. For a family of three or four people with an average-sized kitchen and whose cooking methods are varied, the model should have a capacity of 400/500 m3/h. For larger families and cooking enthusiasts, or where large groups gather in a roomy kitchen to sample exotic recipes, the hood model should have a suction capacity of at least 600 m3/h.
Efficient cooking vapour suction also depends on the correct operation of the product. The hood should be switched on at the first speed level as soon as you begin cooking and the suction speed increased as necessary. Once you have finished cooking, set a lower speed level and leave the hood operating for another 5 to 10 minutes.

Efficient and silent

All Elica hoods are designed and created with these two fundamental concepts in mind. The constant research carried out by Elica led to the introduction of a new suction system, called the Optimized Aspiration System, which provides optimum performance in terms of smoke and vapour suction with a reduced noise level.

Performance

All product performance quoted in this catalogue is measured according to the most recent - and most stringent - technical regulations.

CAPACITY / PRESSURE REGULATION IEC61591
The values (expressed in m/h) q uoted in this catalogue are listed in the technical specification sheet corresponding to each product, under the following headings:
- IEC CAPACITY: The test is performed with sample ducting applied to the product.
- F.O. CAPACITY: Free Outlet: The test is performed directly at the hood outlet.
NOISE LEVEL - Regulations IEC60704-1; IEC60704-2-13
ABSORBED POWER - Motor + Lighting Power
ABSORBED POWER - Motor + Lighting Power

Choosing a model

All models are designed to work as an evacuation (Ducted) version (A), where the air sucked in is expelled outside, or as a recirculation (Filtering) version (B), where the air sucked in is filtered by a grease filter and an odour filter and then released as purified air back into the room.
The choice of which version to install depends entirely on your own requirements. There are, however, some simple measures which should be borne in mind.
For the ducted version, the hood must be connected to the outside environment using special ducting so that all the captured air may be safely expelled outside. For this configuration it is important that the ducting has a sufficiently large diameter (120 mm or larger) and that it is not too long or subjected to many bends. The above information is important in order to prevent load losses, in other words reduced cubic metres of capacity, occurring due to aerodynamic resistance in the duct.
For the filtering version, the hood is not connected to a duct because the air is purified using the relevant active carbon filters and then released back into the room. For this configuration, it is extremely important that the odour filters are subjected to regular maintenance and, if necessary, replaced.

Elica _x_DR.indd 64-65 21/07/2009 11.41.46

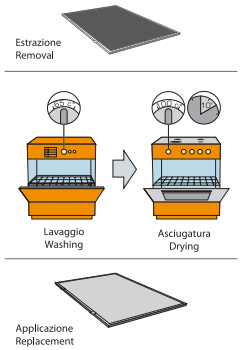

Air filtering
There are two separate air filtering barriers in one hood.
The first, a grease filter, is always present and is located at the air intake area of the product. The grease filter protects the inside of the product by filtering the heaviest grease particles out of the air which has been sucked in. Different types of filter are available: synthetic material filters (which should be replaced regularly), aluminium filters (which are washable) and aluminium filter grids (AFGs), which may be removed easily and washed by hand using washing up liquid or in the dishwasher.
The second type of filter, the odour filter, is only present in filtering versions. These are filters which are dedicated to "washing" the air sucked in by the hood, the air which is then released back into the room.
The traditional solution consists of a plastic container (shaped as necessary) holding granules of active carbon. This special carbon is able to trap and treat grease, moisture and odours. These filters should be replaced regularly, every 3 to 4 months.
Elica can also offer an innovative technological solution: the Long Life Filter.
This special filter guarantees a high level of efficiency but, in contrast to the traditional version, it has an extremely long life cycle. It is not even replaced but instead is reconditioned (normal washing using the dishwasher, followed by drying in the oven for 10 minutes at 100°C) and replaced in the hood.
If these simple instructions are followed, the Long Life Filter can guarantee a high level of efficiency for up to 3 years.

Professional filter
Elica's wealth of experience has enabled the company to create a grease filter which is innovative in its design, in the materials used and in the technology applied. The special internal "labyrinth" structure traps the grease particles in the air without affecting the performance of the hood. Created entirely in steel, the filter can be cleaned easily without the risk of its performance or appearance being affected over time. Thanks to its decidedly solid and professional appearance, this filter enhances the most up-to-date product ranges.

SYSTEMS

Smart - Quicker and easier installation
The versatility of a product and its practicality must be guaranteed from the very first moment.
It is important to ensure that even a large hood can be installed quickly and easily. With this in mind, Elica has fitted many of its models with a particular technology called 'Smart'.
The Smart assembly means that the hood can be fixed with the practical system used to hook the kitchen cabinets to the walls. Furthermore it is extremely simple, when the product has already been hooked on, to find the correct position for the product and to align it properly with the rest of the kitchen.
The products fitted with the Smart assembly can also be fitted with the Long Life Filter (if used as a filtering version).

Perimeter Aspiration
Perimeter aspiration represents an alternative aspiration technology. The product functions in such a way that the airflow is moved from the central area to the external perimeter of the hood, a technique that not only does not overload the motor power but in fact reduces energy consumption and noise. This method also creates a different visual effect, and Elica has taken advantage of this to make the hood even more beautiful. The use of a steel and glass panel provides better illumination for the cooking area and also completely covers the grease filter, thus greatly simplifying cleaning and maintenance operations for the product.

EDS3
Well, that's not something you will have to worry about any longer: bringing a new level of silence to decorative hoods, Elica's patented innovative noise reduction system Elica Deep Silence (EDS3) now means that at low speeds you'll barely hear the hood at all!
The difference made by the sound-absorbing performance of the new EDS3 system in comparison with the previous generation is like comparing a bustling office environment with one or two people chatting quietly in a library. This remarkable reduction in domestic noise pollution creates new possibilities for both the hood and the kitchen.
During normal operation Elica Deep Silence ensures a noise reduction of more than 35% compared to conventional cooker hoods.

Secret Screen
Secret Screen is a completely flat, vertical system of a frontal panel which in operation, open up as if by magic, to provide superb air flow performance. The vertical wall-installation and ultra-flat form also offer a great benefit to the cook, optimising its use above the cook top.
And the hoods "secret ingredient" – its compact, versatile technology – ensures extreme flexibility for performance, design and use, making Secret Screen models truly unique.

Optimised Aspiration System
Every product has its own features in terms of noise and performance. The challenge Elica set itself was to increase the fume capture capacity while keeping the sound emitted by the product down to a constant level. Reducing the aspiration surface creates a powerful increase in the speed with which air is drawn in by the hood. This generates a consistent depression above the cooking surface and so even the hottest fumes or those furthest away are sucked in towards the aspiration area.

CONTROLS

Magic Wand
Cutting edge technology "magically" slipped into a slender steel stem: Elica's patented innovative control interface "Magic Wand" makes operating a product not only easy but a real pleasure as well. Just a light touch on the upper button of the stem to regulate the air-flow or on the lower section to operate the decorative illumination and the lighting for the cook top. An illuminated ring changes colour to indicate the operational status of the hood. The Magic Wand electronic sensor control is present on all the hoods that use the Evolution system.

Safety
During the manufacturing process, Elica hoods are subjected to more than 50 tests and stringent safety and operational checks. Materials, electrical parts and electronic components are repeatedly tested until they are completely guaranteed to fulfil the most stringent safety criteria.
Safety is considered from the moment the design is created. Sheet metals with blunted edges, tempered glass and self-extinguishing plastic materials are the basic features of every Elica product.

Certifications
At company level, Elica S.p.A. holds ISO 9001 certification: VISION 2000 guarantees a high standard of design and manufacturing, and the ISO 14001 certification is evidence of the efficient environmental management system in place.
All our products carry the CE marking, which means they conform to the EC Directives relating to Electromagnetic Compatibility and Low Voltage.
With the aim of offering further guarantees of safety, Elica makes full use of the prestigious international certifying institutions (Nemko, Demko, etc...). The attainment of these (voluntary) awards is, as far as the user is concerned, the best demonstration of the responsibility Elica assumes in the development and creation of its products.

RoHs
Elica, a world leader in the production of ducted hoods, provides its customers with a guarantee that all the products in this catalogue conform to the RoHS regulation and have therefore been manufactured in full compliance with the quality standards set out by the European Directive 2002/95/CE relating to the restrictions in the use of certain hazardous substances in electric and electronic equipment.

Guarantee
In conformity with the European Directive 99/44/CE, all Elica products are guaranteed (Legal Guarantee) for two years. The Guarantee is valid for all countries within the EC.

Elica _x_DR.indd 66-67 21/07/2009 11.41.51

Elica
Via Dante 288
60044 Fabriano AN Italy
T +39 0732 6101
F +39 0732 610249
info@elica.com
www. elica.com

Showroom, Milano - Osaka

DR Cooker Hoods Ltd
2 Alpha Road Aldershot
Hampshire GU12 4RG
T 01252 351111
F 01252 311608
sales@drcookerhoods.co.uk
www. elica.co.uk

Product Design
Elica Team, coordinator Fabrizio Crisà

Art Direction
Fabrizio Crisà

Concept and production
Acanto Comunicazione

Photographs
33 Multimedia Studio

Post production
Elica Team with Rob Marinelli

Photolitographs
Selecolor, Firenze

Coordination
Barbara Persigilli

Print
xxxxxxxxxxxx

This catalogue is of exclusive property of Elica S.p.A. - All rights are reserved. Any form of total or partial reproduction of the catalogue is strictly forbidden.

The printing process do not always permit a faithful reproduction of tones of originals.

Due to the fact that products are in continuous process of improvement, Elica may at any time modify the specifications of the products present in the catalogue.

06/2009

MC00xxx